

### FASTENS ONTO 1/3" WINDOW THICKNESS



Note: "P" or "D" for passener or driver side window



Roll window down 3". Position clip so loop is on the inside of window.

3

Apply light downward pressure to both sides of the clip.  
\*Don't force flag.


4

Raise window slowly not engaging electric window full lift feature on automatic windows.



The window should be rolled up to insure the flag will not fall of while driving.

6

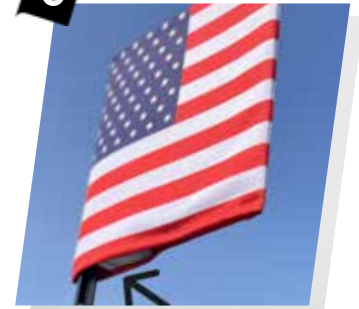

The ilumination swich is on the flag base.

\*Note: LumiFlag is designed to fit tightly onto the window for safety. Some windows are thicker than others. Some older window tint may be affected.